

 **ScaleNET**

Use Your Mobile Device as a Weight Indicator!

Input up to 5 IDs and e-mail, text,
or save the weight ticket

Includes the ID, Time/Date, Gross/Tare/Net,
and GPS location all from your mobile device

*ScaleNET is not
legal for trade.
Shown here with
optional EB base.*



Wi-Fi Transmitter ■ IDs Mobile App ■ Configuration App



Wi-Fi Weight Transmitter

Load cell analog-to-digital converter with Wi-Fi

- Sends weight data from a scale base to a wireless network
- LED light indicates when data packets are being transmitted
- 30 feet maximum distance range (varies depending upon environment)
- Must connect directly to the scale's load cell or junction box (load cell cable not included)
- Capable of powering up to 16 load cells
- Minimal space needed: 2.6-in W x 2-in D x 1.4-in H / 67-mm W x 51-mm D x 37-mm H dimensions
- Polycarbonate box with clear-smoke cover
- Easily connects to an existing network
- Includes configuration utility apps for PC, Android®, and Apple® devices
- USA-made quality and technical support



Includes AC adapter (100-240V/12VDC) model 6800-1045

Cardinal Scale's USA-made ScaleNET Wi-Fi Weight Transmitter is a load cell analog-to-digital converter with Wi-Fi for sending weight data from a scale base to a wireless network. ScaleNET is designed for non-legal-for-trade weighing applications and connects directly to the scale's load cell or junction box.



Link LED

Flashes while searching for a network and displays solid red when connected.

Power LED

Illuminates to indicate when ScaleNET is powered up and running.

Default LED

Indicates when ScaleNET is in the process of resetting the configuration.



ScaleNET Can Provide Wireless Connectivity:

- Bench Scales
- Floor Scales
- Portable Platform Scales
- Axle Pads
- Tank/Hopper Scales
- Ag Bars
- Compression Load Cells


Mobile Device Weight Display

Mobile app with 5 customized IDs for use with ScaleNET

Cardinal Scale's USA-made ScaleNET IDS Mobile App works in conjunction with the ScaleNET Wi-Fi weight transmitter to provide a wireless mobile device weight display and ticket printer. ScaleNET IDS is ideal for non-legal-for-trade agricultural and industrial weighing applications where remote viewing and entry of information through the device is important.


You can view the scale weight directly on your mobile phone or tablet and enter up to 5 customized lines of ID information to be e-mailed, texted, or saved to notes for future reference. Weight tickets may also be printed, and this requires a third-party app for Android® (Google® Cloud Print) and an AirPrint® printer for Apple® devices.

- Available for Android® and Apple® Mobile Devices
- Quickly E-mail, Text, or Save Weight Tickets
- Up to 5 Customizable IDs Per Transaction
- Turns Your Mobile Device Into a Weight Indicator
- Remote Control Operation of the Scale
- USA-Made Quality and Technical Support

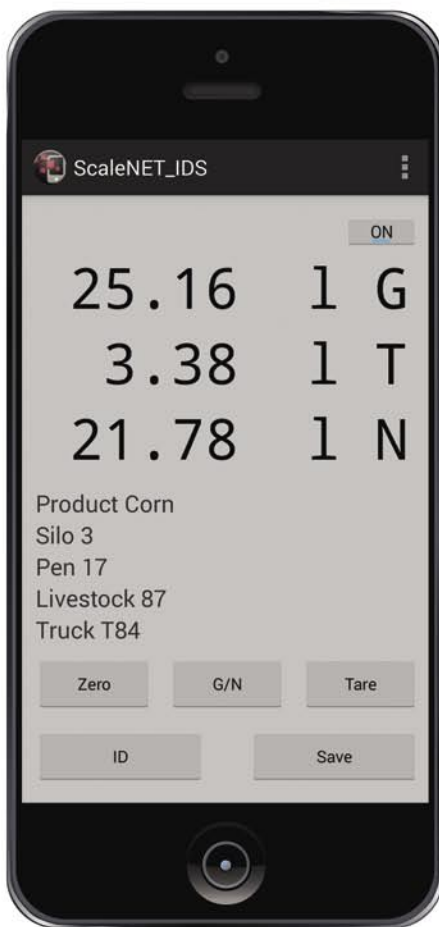


Indicator Remote Control

ScaleNET IDS provides you with remote control over the scale's Zero, Gross/Net, and Tare functions wirelessly via your mobile phone or tablet.

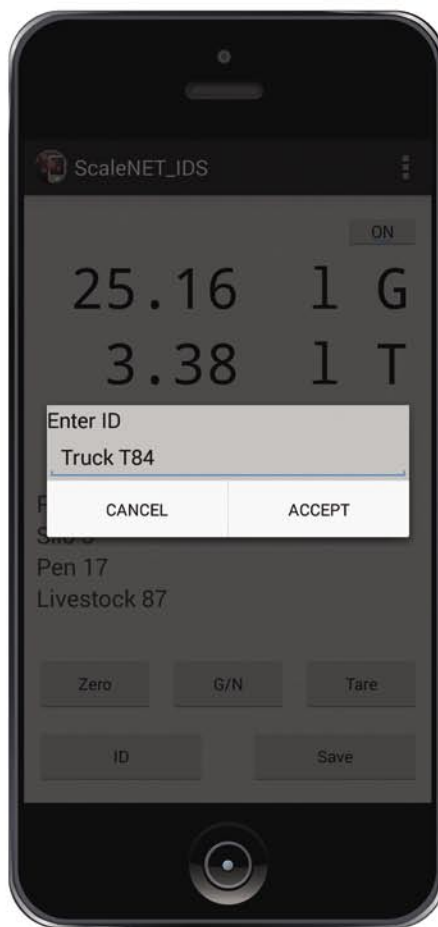

Completely Customizable IDs

Up to five items of completely-customizable information may be entered per transaction with ScaleNET IDS. Simply type the ID and enter the information associated with the weighment.

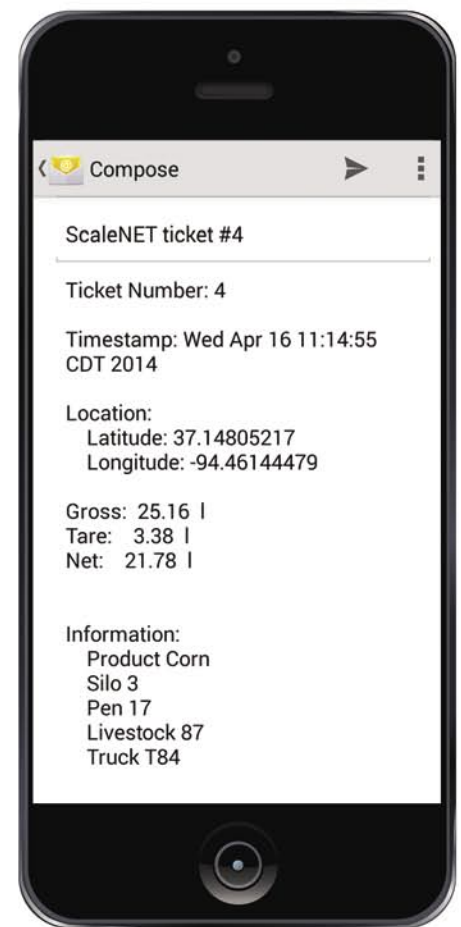


Transmit Weight Data Easily

ScaleNET IDS allows you to easily e-mail, text, print* or save to notes the Ticket Number, Time/Date, GPS location (if enabled), Gross/Tare/Net, plus up to 5 IDs per transaction.



Configuration Utility App FREE

- Displays wireless network signal strength
- May be configured through a laptop, PC, tablet or smart phone
- Network password security protection
- Adjustable noise filtering (IIR and FIR)
- Easily configure Capacity, Interval, Decimal, Sample Rate, Motion Range, Units, and Filtering
- Available on Google Play for Android® devices and the App Store for Apple® devices

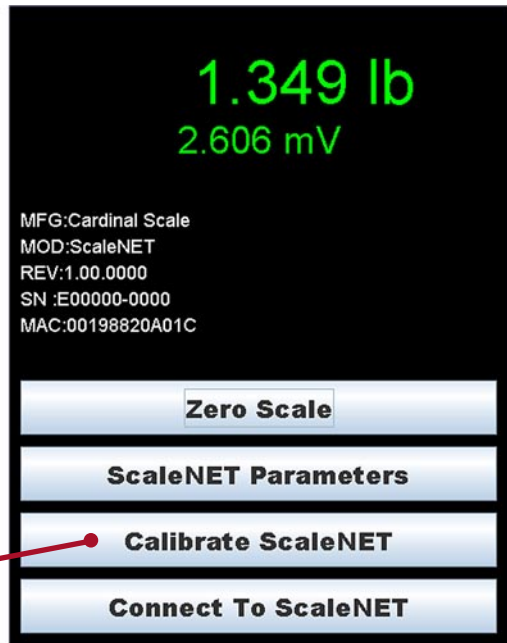

Calibration Options:



SmartCal

One-step fast and easy calibration

Standard Calibration

Utilizing approved test weights for higher accuracy



ScaleNET Wi-Fi Weight Transmitter Specifications

Dimensions:	2.6-in W x 2-in D x 1.4-in H / 67-mm W x 51-mm D x 37-mm H
Distance Range:	30 ft / 10 m maximum (varies depending upon environment)
Power:	Includes AC adapter (100-240V/12VDC) model 6800-1045
Diagnostics:	On board LED's - Default, Link, and Power
Scale Connections:	(1) four terminal connector block
Adjustable Noise Filtering:	IIR and FIR
Temperature Range:	14° to 104° F (-10° to +40° C)
Configuration Utility App Compatibility:	PC, Android®, and Apple® devices

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.



SINCE
1950



203 E. Daugherty, Webb City, MO 64870 USA
Ph: 417-673-4631 or 800-441-4237 • Fax: 417-673-5001
www.CardinalScale.com

Mobile: m.cardinalscale.com

SOLD BY: